

**PRODUCT DIMENSIONS**



**CABLE LENGTH**

The C-OA1/LX-4M is 13 ft. (4 m) long.



**CABLE INSTALLATION**

Wire the C-OA1/LX-4M using the following wiring table.

OUTPUT	FUNCTION	COLOR
0–10 V	+ Signal	 Brown
Analog Common	- Signal	 White

**LYNX™ SURFACE-MOUNT ANALOG OUTPUT MODULE OA1-S-V CABLE**

**C-OA1/LX-4M**




The C-OA1/LX-4M cable is designed for use with the RJG, Inc. Lynx™ Surface-Mount Analog Output Module OA1-S-V and the eDART® or CoPilot® System.

**TECHNICAL SPECIFICATIONS**

The C-OA1/LX-4M cable is suited for the heat and stress found in injection molding environments. Designed specifically for use with RJG, Inc.’s analog output module OA1-S-V and the eDART or CoPilot System, the C-OA1/LX-4M provides a connection from equipment with 0–10 V DC to the OA1-S-V.

CABLE	CONNECTIONS
0–10 V DC sensor or input	refer to wiring table
OA1-S-V	Female 4-pin Connector

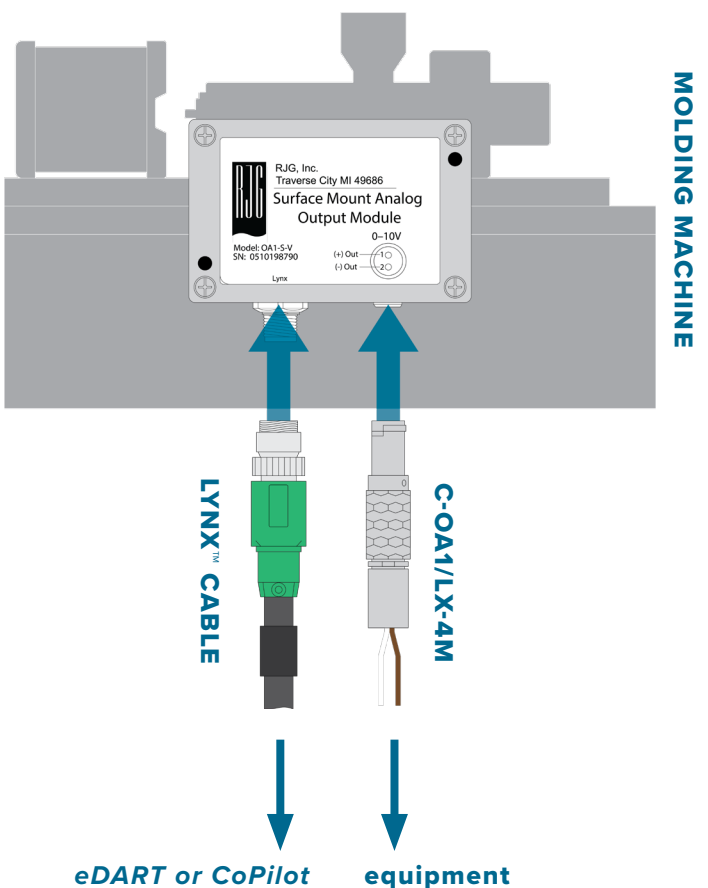

## COMPATIBLE RJG, INC. PRODUCTS


### ANALOG OUTPUT MODULE TYPE

OA1-S-V

Metal Surface-Mount,  
Shielded

### DIMENSIONS

3.86" W x 1.41" D x 2.52" H  
(98,0 mm W x 35,8 mm D x  
64,0 mm H)

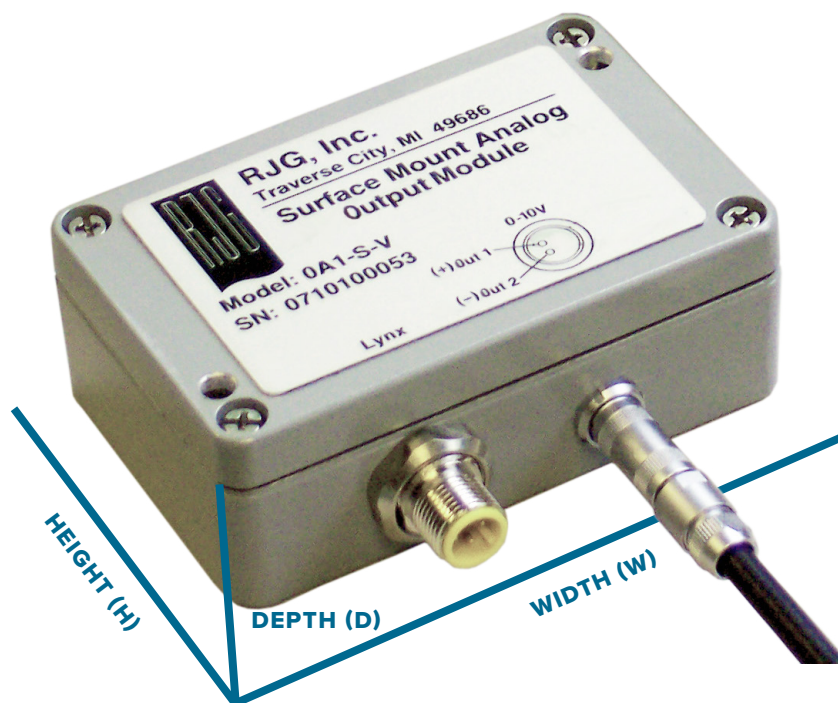

### OA1-S-V

### PRODUCT

### DESCRIPTION

RJG, Inc. eDART  
System

Process monitoring  
and control system for  
plastic injection molding  
applications

RJG, Inc. CoPilot  
System

Process monitoring  
and control system for  
plastic injection molding  
applications



**eDART**



**CoPilot**