



**PRODUCT DIMENSIONS**

**CABLE LENGTH**

The C-OR2-M-3M is 9.8 ft. (3 m) long.



**LYNX™ SHIELDED DUAL-RELAY  
OUTPUT MODULE OR2-M CABLE**

**C-OR2-M-3M**



**CABLE INSTALLATION**

Wire the C-OR2-M-3M using the following wiring table.

| RELAY | SIGNAL          | COLOR |
|-------|-----------------|-------|
| CR1   | Normally Open   | Brown |
| CR1   | Common          | Black |
| CR1   | Normally Closed | Blue  |
| CR2   | Normally Open   | Brown |
| CR2   | Common          | Black |
| CR2   | Normally Closed | Blue  |

Contact Rating 1A 30 V DC

The C-OR2-M-3M cable is designed for use with the RJG, Inc. Lynx Shielded Dual-Relay Output Module OR2-M and the eDART® or Copilot® System.

**TECHNICAL SPECIFICATIONS**


The C-OR2-M-3M cable is suited for the heat and stress found in injection molding environments. Designed specifically for use with RJG, Inc.'s Lynx relay module OR2-M and the eDART or CoPilot System, the C-OR2-M-3M provides a connection from equipment to the RJG, Inc. OR2-M.

Connect the C-OR2-M-3M to the molding machine input card for use with V→P transfer or injection enable; connect the C-OR2-M-3M to sorting equipment for part sorting.

**CABLE CONNECTIONS**

|           |                       |
|-----------|-----------------------|
| Equipment | refer to wiring table |
| OR2-M     | Male 4-pin Connector  |

**MOLDING MACHINE**

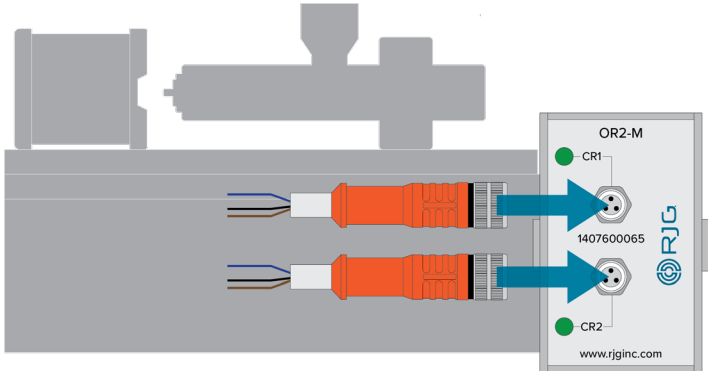

**C-OR2-M-3M (2)**

## COMPATIBLE RJG, INC. PRODUCTS

### LYNX RELAY MODULE

### TYPE

### DIMENSIONS

OR2-M

Metal DIN Rail Mount,  
Shielded

1.97" W x 1.22" D x 2.97" H  
(50,15 mm W x 31,05 mm D x  
75,4 mm H)



**OR2-M**

### PRODUCT

### DESCRIPTION

RJG, Inc. eDART  
System

Process monitoring  
and control system for  
plastic injection molding  
applications

RJG, Inc. CoPilot  
System

Process monitoring  
and control system for  
plastic injection molding  
applications



**eDART**



**CoPilot**