

LYNX™ SHIELDED COMMUNICATIONS ADAPTER MODULE

DIN/LX-M





The Lynx™ shielded communications adapter DIN/LX-M is a Lynx-to-DIN-rail communications module that interfaces other RJG, Inc. Lynx shielded DIN-rail mounted modules to the eDART® or CoPilot® systems when a Lynx shielded sequence module ID7-D-SEQ is not used. This DIN-rail module is shielded to ensure high quality data even in rugged molding environments.

TECHNICAL SPECIFICATIONS

TEMPERATURE

MAX Operating Temperature 140 °F 60 °C

PRODUCT DIMENSIONS

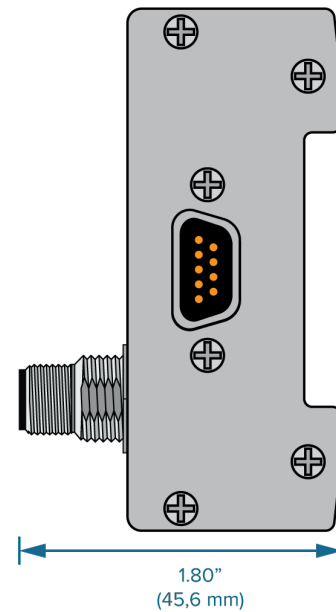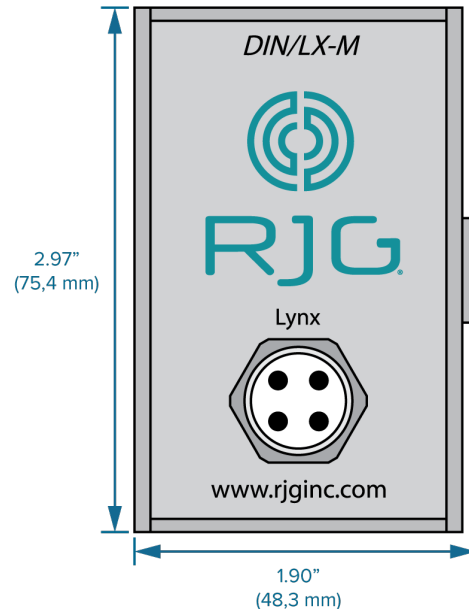

COMPATIBLE CABLE

CE-LX5-W	12, 40, 79, 158, 236, 472"
	(0,3, 1,0, 2,0, 4,0, 12,0 m)



CABLE LENGTH

INSTALLATION

Refer to product manual for all installation dimensions and instructions—available for download online at www.rjginc.com.

1 DIN/LX-M—Lynx Shielded Communications Adapter Module

2 CE-LX5-W—Lynx Premium Cable (x2)

3 J-LX1—Lynx Single Feed-Through Junction

4 eDART or CoPilot System

