
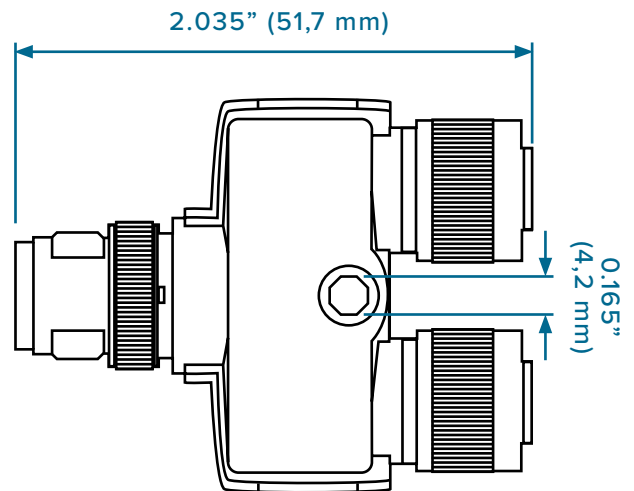


PRODUCT DIMENSIONS

TWO-PORT LYNX JUNCTION

J-LX2-CE

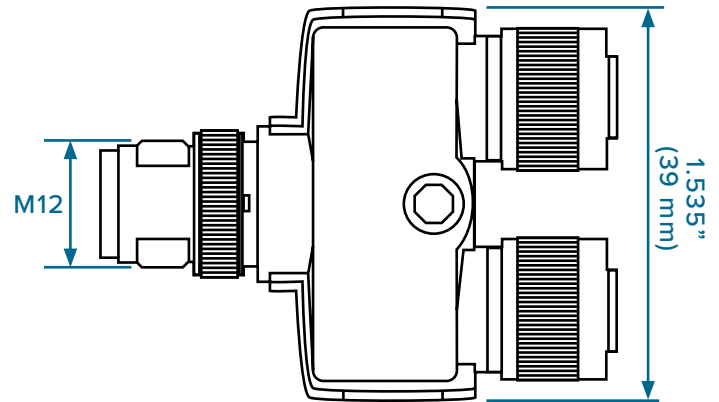

The two-port Lynx junction J-LX2-CE is designed for use with RJG, Inc. CE-LX5-W Lynx premium cables and adapters, and the RJG, Inc. eDART® or CoPilot® process control and monitoring systems.

TECHNICAL SPECIFICATIONS

The J-LX2-CE two-port Lynx junction features a TPU body with nickel-plated, die-cast, zinc connectors suited for the heat and stress found in injection molding environments. Designed specifically for use with RJG, Inc.'s Lynx premium cables, the J-LX2-CE provides a quick, direct connection from RJG sensors and adapters to the RJG, Inc. eDART® or CoPilot® process control and monitoring systems.

COMPATIBLE CABLE

| | |
|-----------------------------|--|
| CE-LX5-W Lynx Premium Cable | 12, 40, 79, 158, 236, 472" (0.3, 1.0, 2.0, 4.0, 12.0 m) |
|-----------------------------|--|



CABLE ORDERING LENGTH

JUNCTION

CONNECTORS

| | |
|--------------------|-----------------------------|
| Connection In (2) | Five-Pin M12 Socket |
| Connection Out (1) | Five-Pin M12 Male Connector |

INSTALLATION

Refer to product manual and installation guide for all dimensions—available for download online at www.rjginc.com.

1 J-LX2-CE—Lynx Two-Port Junction

2 eDART or CoPilot System

3 CE-LX5-W—Lynx Premium Cables

4 to Lynx Device

