


PRODUCT DIMENSIONS

LYNX™ FIVE-PORT JUNCTION
J-LX5-CE



The Lynx™ Five-Port Junction J-LX5-CE provides connection and power for up to five Lynx devices to the eDART® or CoPilot® systems through a single connection, and can be machine- or mold-mounted, including on moving or stationary platens or mold halves.

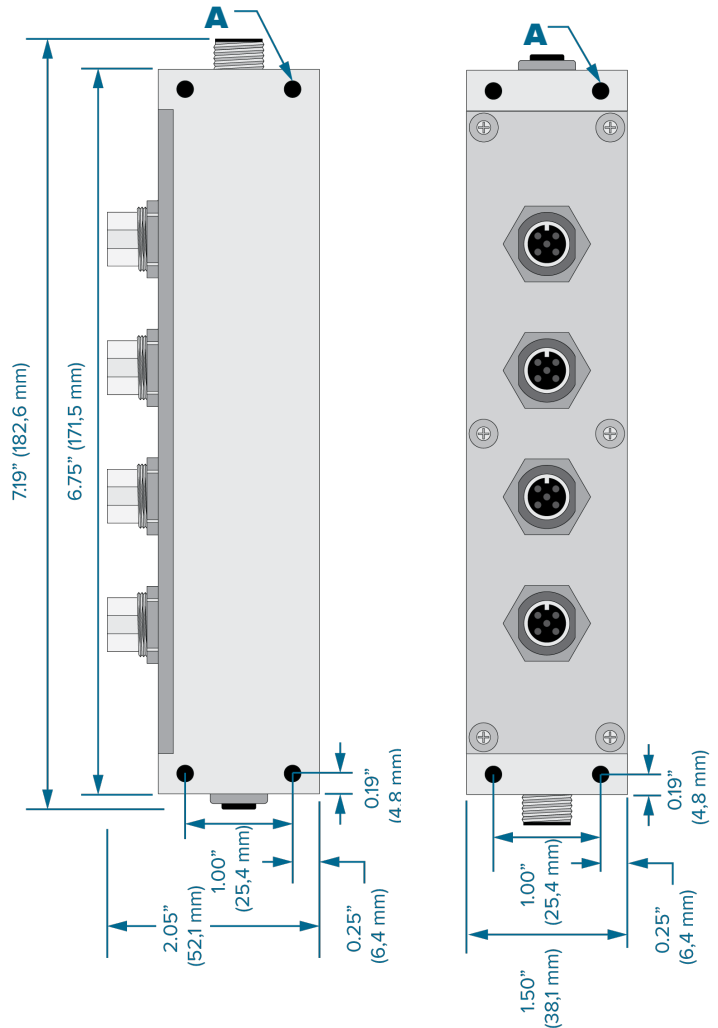

MOUNTING HOLES (A):
DRILL AND TAP FOR #6-32 X1.75" SHCS

TECHNICAL SPECIFICATIONS

The J-LX5-CE provides one male and four female Lynx connections, enabling the junction of up to five Lynx devices and the eDART or CoPilot systems.

CONNECTIONS


Female	Lynx Four-Pin Female (x4)
Male	Lynx Four-Pin Male (x1)

TEMPERATURE

MAX Operating Temperature	185° F (85° C)
---------------------------	----------------

COMPATIBLE CABLES

CE-LX5	12, 40, 79, 158, 236, 472"
	(0,3, 1,0, 2,0, 4,0, 12,0 m)

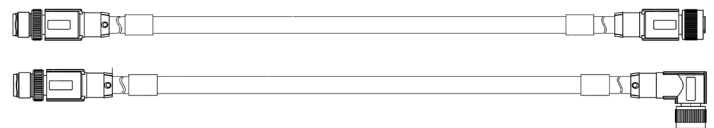

CABLE ORDERING LENGTH

INSTALLATION

Refer to product manual and installation guide for all dimensions—available for download online at www.rjginc.com.

1 J-LX5-CE—Lynx Five-Port Junction

2 to Lynx device

3 eDART or CoPilot system

4 CE-LX5—Lynx Cable

