


PRODUCT DIMENSIONS

**LYNX™ FIVE-PORT JUNCTION
J-LX5-CE**



The Lynx™ Five-Port Junction J-LX5-CE provides connection and power for up to five Lynx devices to the eDART® or CoPilot® systems through a single connection, and can be machine- or mold-mounted, including on moving or stationary platens or mold halves.

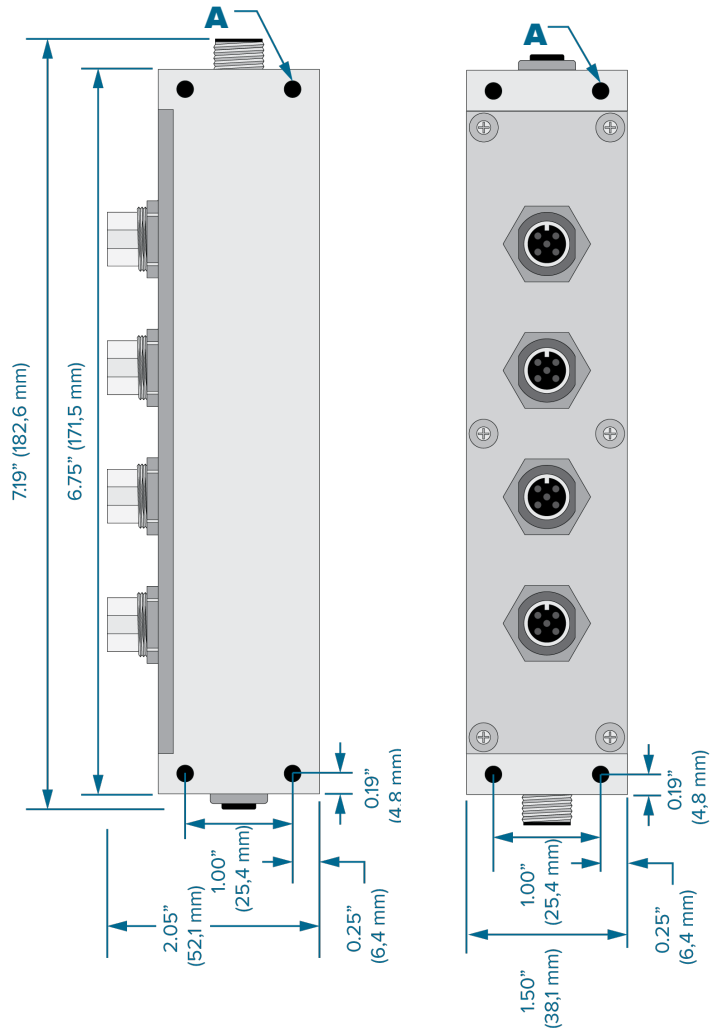

**MOUNTING HOLES (A):
DRILL AND TAP FOR #6-32 X1.75" SHCS**

TECHNICAL SPECIFICATIONS

The J-LX5-CE provides one male and four female Lynx connections, enabling the junction of up to five Lynx devices and the eDART or CoPilot systems.

CONNECTIONS

Female	Lynx Four-Pin Female (x4)
Male	Lynx Four-Pin Male (x1)

TEMPERATURE

MAX Operating Temperature	185° F (85° C)
---------------------------	----------------

COMPATIBLE CABLES

CE-LX5-W Lynx Premium Cable	12, 40, 79, 158, 236, 472" (0,3, 1,0, 2,0, 4,0, 12,0 m)
-----------------------------	--



CABLE ORDERING LENGTH

INSTALLATION

Refer to product manual and installation guide for all dimensions—available for download online at www.rjginc.com.

1 J-LX5-CE—Lynx Five-Port Junction

2 to Lynx device

3 eDART or CoPilot system

4 CE-LX5-W—Lynx Premium Cable

