

LYNX™ NINE-PORT JUNCTION

J-LX9-CE



The Lynx™ Nine-Port Junction J-LX9-CE provides connection and power for up to nine Lynx devices to the eDART® or CoPilot Systems through a single connection, and can be machine- or mold-mounted, including on moving or stationary platens or mold halves.

TECHNICAL SPECIFICATIONS

The J-LX9-CE provides one male and nine female Lynx connections, enabling the junction of up to nine Lynx devices and the eDART or CoPilot systems.


CONNECTIONS

Female	Lynx Four-Pin Female (x9)
Male	Lynx Four-Pin Male (x1)

TEMPERATURE

MAX Operating Temperature	185° F (85° C)
---------------------------	----------------

PRODUCT DIMENSIONS

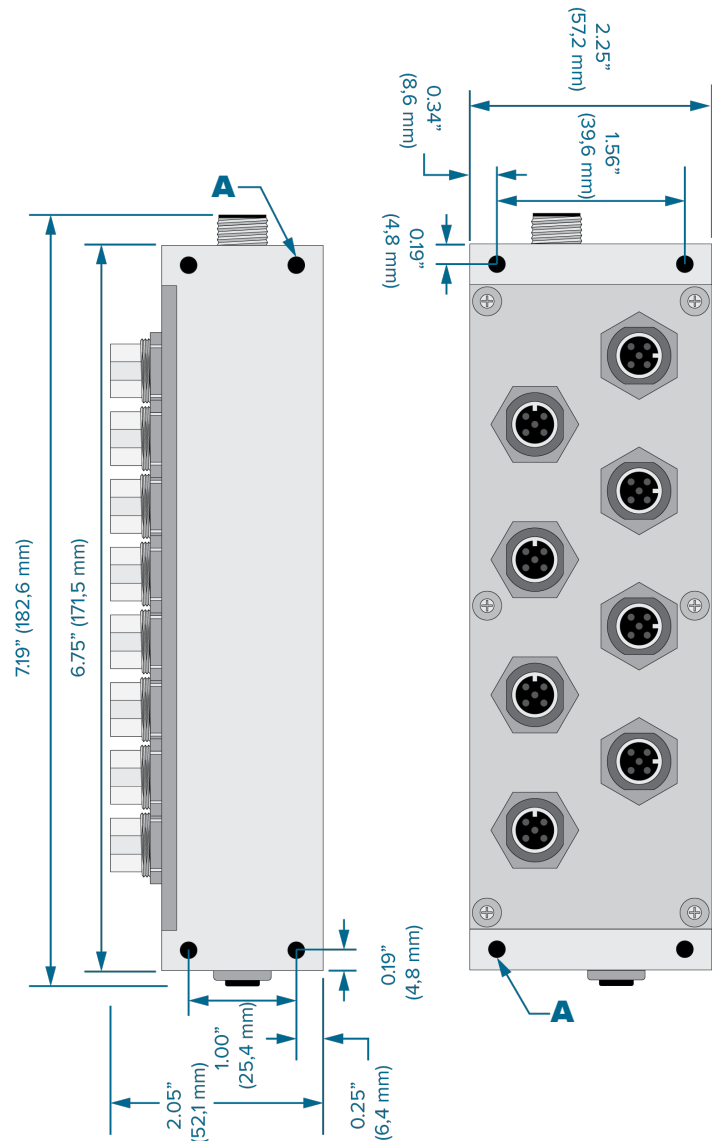


MOUNTING HOLES (A):

DRILL AND TAP FOR #6-32 X1.75" SHCS

COMPATIBLE CABLES

CE-LX5	12, 40, 79, 158, 236, 472" (0,3, 1,0, 2,0, 4,0, 12,0 m)
--------	--

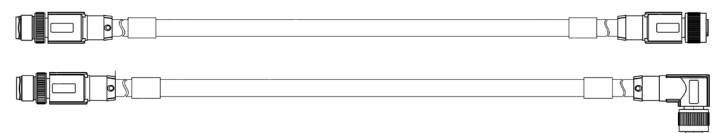

CABLE ORDERING LENGTH

INSTALLATION

Refer to product manual and installation guide for all dimensions—available for download online at www.rjginc.com.

1 J-LX9-CE—Lynx Five-Port Junction

2 to Lynx device

3 eDART or CoPilot system

4 CE-LX5—Lynx Cable

