



**PRODUCT DIMENSIONS**

**LYNX™ MOLD-MOUNT PIEZOELECTRIC SENSOR ADAPTER**

**LP/LX1-M**

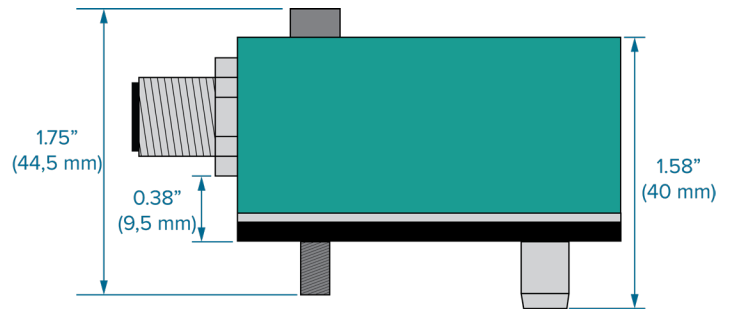


The Lynx™ mold-mount piezoelectric sensor adapter LP/LX1-M provides cavity pressure sensor users with a convenient, simple interface between a single piezoelectric sensor and the RJG, Inc. eDART® system.

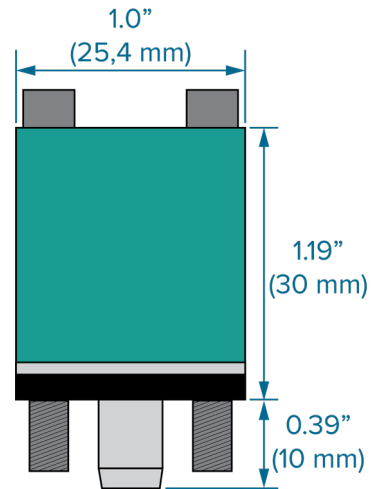

**TECHNICAL SPECIFICATIONS**

Range	0–20,000 pC
Accuracy	±1%
Max. Operating Temperature	140 °F (60 °C)
Warm-Up Time	5 minutes

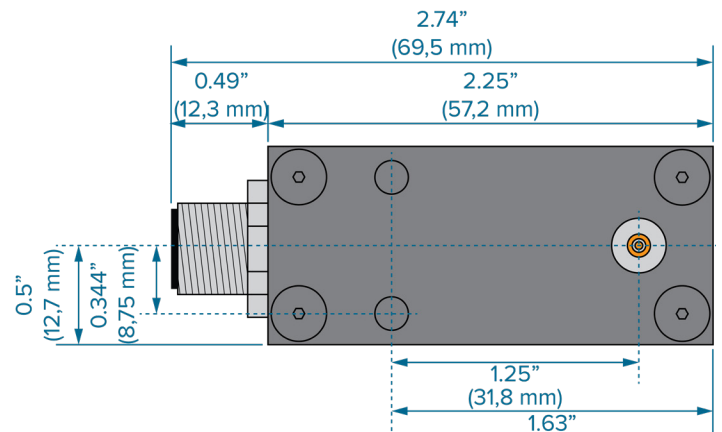

## INSTALLATION

Refer to the Lynx Mold Mount Piezoelectric Sensor Adapter LP/LX1-M Product Manual for more installation, setup, and troubleshooting information—available for free download online at [www.rjginc.com](http://www.rjginc.com).

- 1 Single Channel Piezoelectric Sensor Cable 1645<sup>1,2</sup>
- 2 eDART or CoPilot system<sup>1</sup>
- 3 Lynx Premium Cable CE-LX5-W<sup>1,3</sup>
- 4 Lynx Mold Mount Piezoelectric Adapter LP/LX1-M

**CAUTION** *Must be mounted on a frame-grounded structure or control panel; ground potential is equal to that used by the eDART—adapter and cables are free from contact with static sources such as feeder tubes and material hoppers.*

- 1 Purchased separately.
- 2 1645 cable available in multiple lengths.
- 3 CE-LX5-W cable available in multiple lengths, with straight or 90° connector options.

