



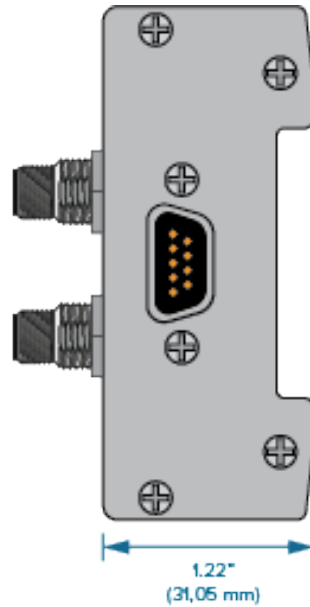

PRODUCT DIMENSIONS

LYNX™ SHIELDED DUAL-RELAY OUTPUT MODULE

OR2-M

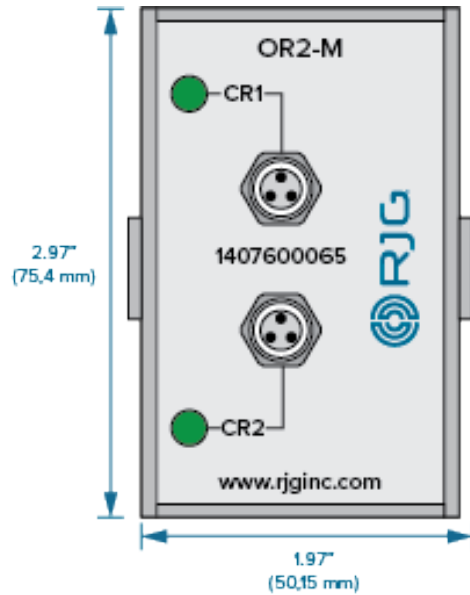

The Lynx™ shielded dual-output relay module OR2-M is a DIN-rail-mounted module that is wired to the molding machine in order to provide output signals from the eDART® or CoPilot® system for part sorting, injection enable, or transfer (V→P). The use of an ID7-M-SEQ (or a DIN/LX-D) module is required to physically connect the OR2-M to the eDART or CoPilot system. This DIN-rail module is shielded to ensure high-quality data even in rugged molding environments.

TECHNICAL SPECIFICATIONS

TEMPERATURE

MAX Operating Temp. 140 °F 60 °C

OR2-M

Fused, Dry Contacts 2

Contact Rating 1A 30 V DC

COMPATIBLE CABLE

C-OR2-M-3M 9.8 ft. (3 m)



CABLE LENGTH

INSTALLATION

Refer to product manual for all installation dimensions and instructions—available for download online at www.rjginc.com.

1 OR2-M—Lynx Shielded Dual-Relay Output Module

2 C-OR2-M-3M—Lynx Shielded Dual-Relay Output Module Cable (x2)

3 Machine Input Card or Robot[†]

4 ID7-M-SEQ or DIN/LX-M—Lynx Shielded Sequence Module or Lynx Communications Adapter

5 CE-LX5—Lynx Cable

6 J-LX1—Lynx Single Feed-Through Junction

7 CE-LX5—Lynx Cable

8 eDART or CoPilot System

[†] wiring installation depends upon desired use and connected equipment.

