

FOUR-CHANNEL PIEZOELECTRIC SENSOR CONNECTOR WITH MOLD ID

PZ-4



The four-channel piezoelectric sensor connector with mold ID interfaces up to four piezoelectric sensors with the RJG, Inc. four-channel piezoelectric sensor adapter PZ/LX4F-S-ID and the eDART® or CoPilot system.

TECHNICAL SPECIFICATIONS


TEMPERATURES

Connector Temperature Max.	392 °F	200 °C
Mold ID Temperature Max.	257 °F	125 °C

CONNECTIONS

Sensor Cable Connectors	MCX Coaxial
Cable Connector	6-Pin Fischer

PRODUCT DIMENSIONS

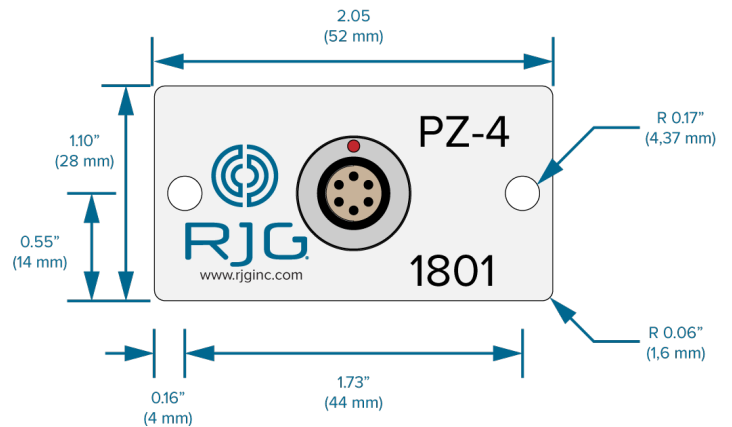

SENSOR CABLE C/PZ-1645 ORDERING LENGTH

CABLE LENGTH		PART NO.
7.9"	0.2 m	C-PZ/1645-0.2
15.7"	0.4 m	C-PZ/1645-0.4
23.6"	0.6 m	C-PZ/1645-0.6
31.5"	0.8 m	C-PZ/1645-0.8
47.2"	1.2 m	C-PZ/1645-1.2
63.0"	1.6 m	C-PZ/1645-1.6
78.7"	2.0 m	C-PZ/1645-2.0



ADAPTER CABLE C-PZ/LX4F-S ORDERING LENGTH

CABLE LENGTH		PART NO.
19.7"	0.5 m	C-PZ/LX4F-S-.5M
39.4"	1.0 m	C-PZ/LX4F-S-1M
78.7"	2.0 m	C-PZ/LX4F-S-2M

INSTALLATION

Refer to product manual for all dimensions and installation specifications—available for download online at www.rjginc.com.

1 PZ-4—Four-Channel Piezoelectric Connector

2 C-PZ/1645—Four-Channel Piezoelectric Sensor Connector PZ-4 Cable

3 PZ/LX4F-S-ID—Four-Channel Piezoelectric Sensor Adapter with Mold ID

4 C-PZ/LX4F-S—Four-Channel Piezoelectric Sensor Adapter Cable

