

## LYNX™ FOUR-CHANNEL PIEZOELECTRIC SENSOR ADAPTER WITH MOLD ID

### PZ/LX4F-S-ID



The four-channel piezoelectric sensor adapter with mold ID is an adapter that interfaces the RJG, Inc. four-channel piezoelectric sensor connector PZ-4 and up to four piezoelectric sensors to the eDART® or CoPilot® systems.

## TECHNICAL SPECIFICATIONS


### ENVIRONMENTAL & PERFORMANCE

Channels	4 Piezoelectric	
Temperature MAX	140 °F	60 °C
Range	0–20,000 pC	
Accuracy	±1.0%	
Warm-Up Time	5 minutes	

### CONNECTIONS

Lynx Input	5-Pin M12 Connector
Lynx Output	5-Pin M12 Socket
Piezoelectric Input	Fischer 6-Pin

## PRODUCT DIMENSIONS

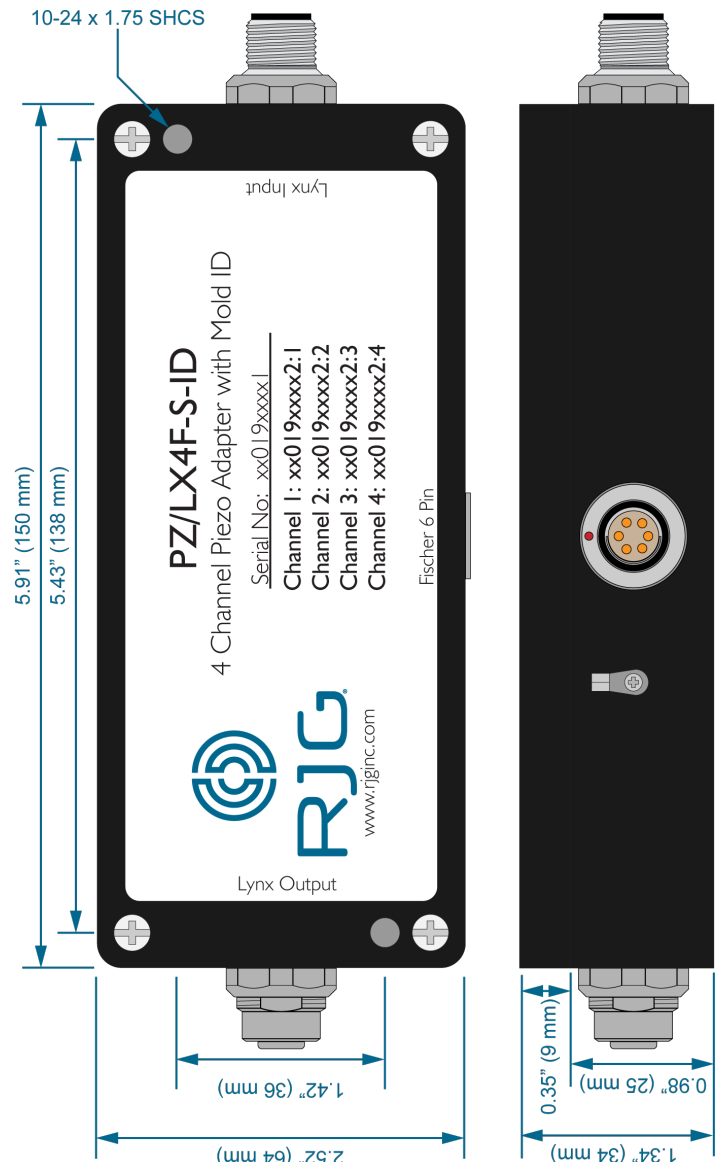

### ADAPTER CABLE C-PZ/LX4F-S ORDERING LENGTH

#### CABLE LENGTH

#### PART NO.

19.7"	0.5 m	C-PZ/LX4F-S-.5M
39.4"	1.0 m	C-PZ/LX4F-S-1M
78.7"	2.0 m	C-PZ/LX4F-S-2M

## INSTALLATION

Refer to product manual for all dimensions and installation specifications—available for download online at [www.rjginc.com](http://www.rjginc.com).

1	PZ-4—Four-Channel Piezoelectric Connector
2	C-PZ/1645—Four-Channel Piezoelectric Sensor Connector PZ-4 Cable
3	PZ/LX4F-S-ID—Four-Channel Piezoelectric Sensor Adapter with Mold ID
4	C-PZ/LX4F-S-ID—Four-Channel Piezoelectric Sensor Adapter Cable

## REQUIRED SOFTWARE

eDART V9	9.4.3 (or higher)
eDART V10	10.8 (or higher)
CoPilot	4.2.0 (or higher)

